

EARTH WORK EXCAVATION & COMPONENT DETAILS

Bund

Homogeneous · repair of existing bund · 1 surveyed section · crest 6.00 m · U/S 1:2.00 · D/S 1:2.00 · TBL 100.00

Jungle clearance IRR-PMW-1-2


Total quantity	0.00	sq.m
----------------	------	------

Formation of embankment, including compaction IRR-DAW-5-6

Total quantity	0.00	cum
----------------	------	-----

Berm — D/S berm at RL 97.500

A berm generates no earthwork item of its own: the shelf is part of the proposed design face, so the fill that forms it is already measured inside the formation quantity. Only what is placed on the shelf is billed here.

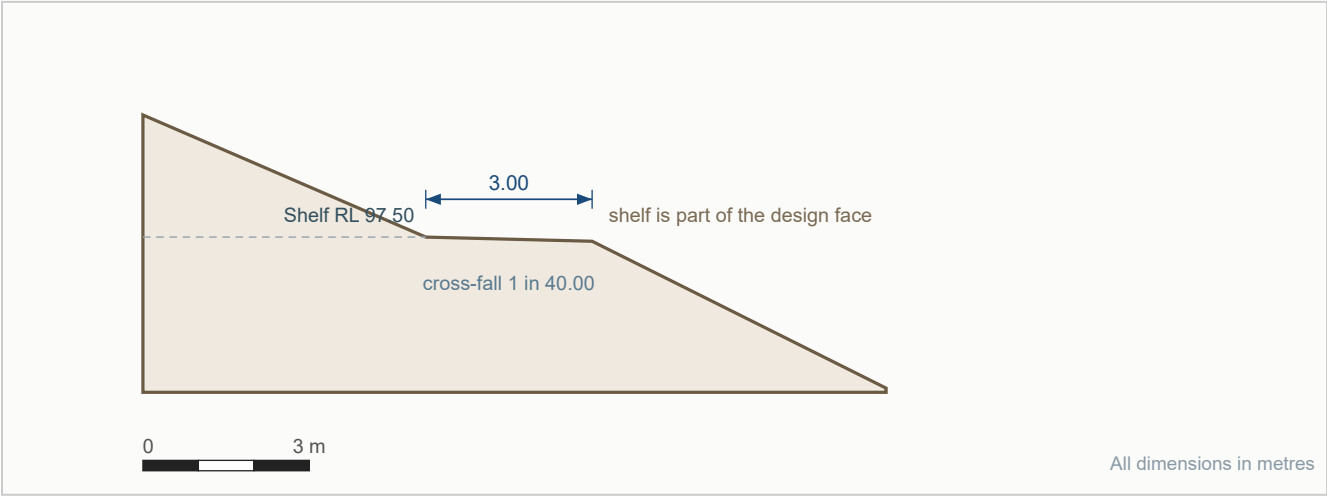

Shelf RL	97.500	
Shelf width	3.00	m
Cross-fall	1 in 40.00	


CROSS-SECTIONS

Bund

Homogeneous · repair of existing bund · 1 surveyed section · crest 6.00 m · U/S 1:2.00 · D/S 1:2.00 · TBL 100.00

Cross-sections

Ch 0

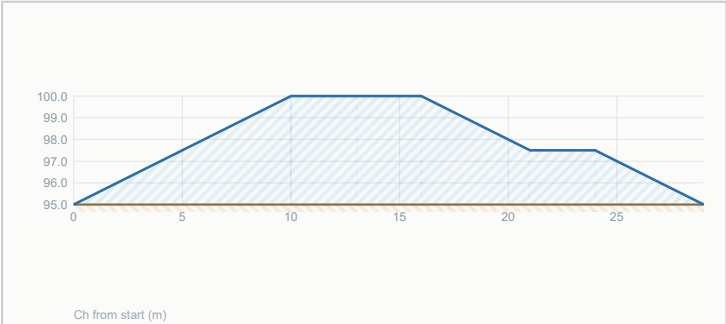

Perimeter	29.000 m	Slope - U/S	11.180 m
Slope - D/S	11.180 m	Stripping Area	8.700 m²

Ch	EL	RL	Calculation	Quantity
0.00	95.000	95.000	Start point	—
10.00	95.000	100.000	$10 \times [(95 - 95) + (100 - 95)] \div 2$	25.000
13.00	95.000	100.000	$3 \times [(100 - 95) + (100 - 95)] \div 2$	15.000
16.00	95.000	100.000	$3 \times [(100 - 95) + (100 - 95)] \div 2$	15.000
21.00	95.000	97.500	$5 \times [(100 - 95) + (97.5 - 95)] \div 2$	18.750
24.00	95.000	97.500	$3 \times [(97.5 - 95) + (97.5 - 95)] \div 2$	7.500
29.00	95.000	95.000	$5 \times [(97.5 - 95) + (95 - 95)] \div 2$	6.250
Total Formation Quantity				87.500 m³