


CROSS-SECTIONS

Bund

Homogeneous · repair of existing bund · 1 surveyed section · crest 3.00 m · U/S 1:2.00 · D/S 1:2.00 · TBL 100.00

Cross-sections

Ch 0

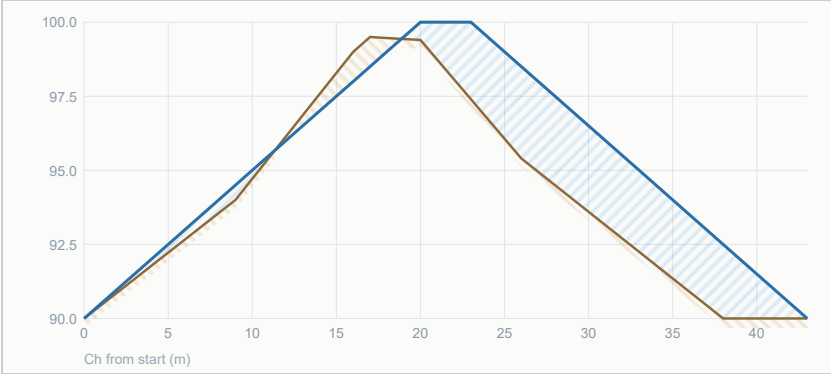

Ch	EL	RL	Calculation	Quantity
0.00	90.000	90.000	Start point	—
9.00	94.000	94.500	$9.00 - 0.00 \times [(90.000 - 90.000) + (94.500 - 94.000)] / 2$ (positive part)	2.250
10.00	94.714	95.000	$10.00 - 9.00 \times [(94.500 - 94.000) + (95.000 - 94.714)] / 2$	0.393
11.33	95.667	95.666	$11.33 - 10.00 \times [(95.000 - 94.714) + (95.666 - 95.667)] / 2$ (positive part)	0.190
15.00	98.286	97.500	No positive formation	0.000
16.00	99.000	98.000	No positive formation	0.000
17.00	99.500	98.500	No positive formation	0.000
18.00	99.467	99.000	No positive formation	0.000
18.88	99.438	99.438	No positive formation	0.000
20.00	99.400	100.000	$20.00 - 18.88 \times [(99.438 - 99.438) + (100.000 - 99.400)] / 2$ (positive part)	0.337
21.50	98.400	100.000	$21.50 - 20.00 \times [(100.000 - 99.400) + (100.000 - 98.400)] / 2$	1.650
23.00	97.400	100.000	$23.00 - 21.50 \times [(100.000 - 98.400) + (100.000 - 97.400)] / 2$	3.150
26.00	95.400	98.500	$26.00 - 23.00 \times [(100.000 - 97.400) + (98.500 - 95.400)] / 2$	8.550
33.00	92.250	95.000	$33.00 - 26.00 \times [(98.500 - 95.400) + (95.000 - 92.250)] / 2$	20.475
38.00	90.000	92.500	$38.00 - 33.00 \times [(95.000 - 92.250) + (92.500 - 90.000)] / 2$	13.125
43.00	90.000	90.000	$43.00 - 38.00 \times [(92.500 - 90.000) + (90.000 - 90.000)] / 2$ (positive part)	6.250
Total Formation Quantity				56.370 m²

Perimeter	43.000 m	Slope - U/S	22.361 m	Slope - D/S	22.361 m	Stripping Area	14.909 m²
-----------	----------	-------------	----------	-------------	----------	----------------	-----------