


Bund

Impervious zone · repair of existing bund · 1 surveyed section · crest 6.00 m · U/S 1:2.00 · D/S 1:2.00 · TBL 100.00

Cross-sections

Ch 0

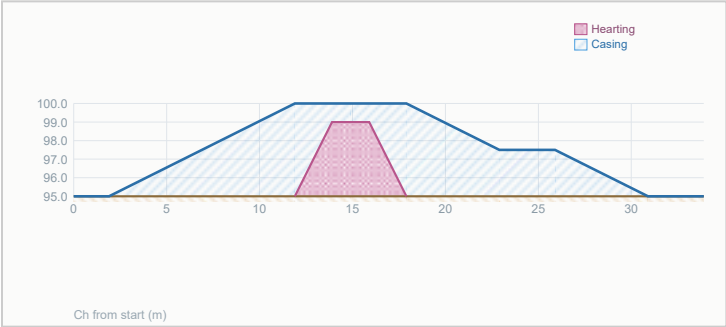

Hearing contacts and top RL

Ch	Contact of hearing	EL	RL	End of hearing
0	11.90	95.000	99.000	17.90

Casing quantity

Ch	EL	RL (casing)	Calculation	Quantity
0.00	95.000	95.000	Start point	—
1.90	95.000	95.000	$1.9 \times [0 + 0] \div 2$	0.000
11.90	95.000	100.000	$10 \times [0 + 5] \div 2$	25.000
13.90	95.000	100.000	$2 \times [5 + 1] \div 2$	6.000
14.90	95.000	100.000	$1 \times [1 + 1] \div 2$	1.000
15.90	95.000	100.000	$1 \times [1 + 1] \div 2$	1.000
17.90	95.000	100.000	$2 \times [1 + 5] \div 2$	6.000
22.90	95.000	97.500	$5 \times [5 + 2.5] \div 2$	18.750
25.90	95.000	97.500	$3 \times [2.5 + 2.5] \div 2$	7.500
30.90	95.000	95.000	$5 \times [2.5 + 0] \div 2$	6.250
33.90	95.000	95.000	$3 \times [0 + 0] \div 2$	0.000
Total Casing Quantity				71.500 m²

Ch	EL	RL	Calculation	Quantity
0.00	95.000	95.000	Start point	—
1.90	95.000	95.000	$1.9 \times [(95 - 95) + (95 - 95)] \div 2$	0.000
11.90	95.000	100.000	$10 \times [(95 - 95) + (100 - 95)] \div 2$	25.000
14.90	95.000	100.000	$3 \times [(100 - 95) + (100 - 95)] \div 2$	15.000
17.90	95.000	100.000	$3 \times [(100 - 95) + (100 - 95)] \div 2$	15.000
22.90	95.000	97.500	$5 \times [(100 - 95) + (97.5 - 95)] \div 2$	18.750
25.90	95.000	97.500	$3 \times [(97.5 - 95) + (97.5 - 95)] \div 2$	7.500
30.90	95.000	95.000	$5 \times [(97.5 - 95) + (95 - 95)] \div 2$	6.250
33.90	95.000	95.000	$3 \times [(95 - 95) + (95 - 95)] \div 2$	0.000
Total Formation Quantity				87.500 m²

Perimeter	33.900 m	Slope - U/S	11.180 m
-----------	----------	-------------	----------

Slope - D/S	11.180 m	Stripping Area	10.170 m²
-------------	----------	----------------	-----------

— casing	71.500	m²
— hearing	16.000	m²