

Bund #1 [West]

B1

Abstract of Estimate

Abstract of Estimate


Jungle clearance	1,000.00
------------------	----------

Test reservoir

Bund #1 [West]

Homogeneous · New bund · 3 surveyed section(s) · Bund length 60 m · Datum 0 m · Crest 6 m

MWL (m)	Freeboard (m)	TBL (m)	FTL (m)	U/S slope	D/S slope
98.5	1.5	100	98	2:1	2:1

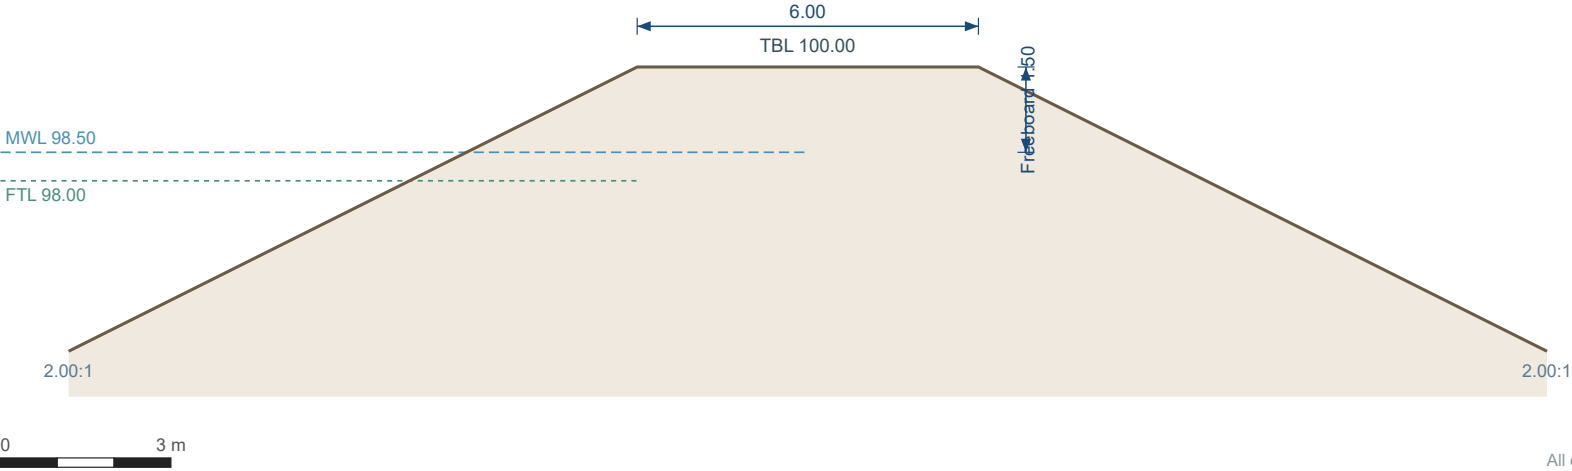

All dimensions in metres

Statement of quantities

Mean-sectional measurement: average of the two end sections × interval length. Each schedule repeats its chainages so it stays readable across pages.

Chainage	Average toe RL (m)	Height (m)	Base width (m)
0	95	5.3	26
30	95	5.3	26
60	95	5.3	26

From Ch.	To Ch.	Length (m)	Start (m ²)	End (m ²)	Average	Qty (m ²)
0	30	30	26	26	26	780
30	60	30	26	26	26	780
Total						1560 m ²

From Ch.	To Ch.	Length (m)	Start (m ²)	End (m ²)	Average	Qty (m ³)
0	30	30	7.8	7.8	7.8	234
30	60	30	7.8	7.8	7.8	234
Total						468 m ³

From Ch.	To Ch.	Length (m)	Start (m ²)	End (m ²)	Average	Qty (m ³)
0	30	30	80	80	80	2400
30	60	30	80	80	80	2400
Total						4800 m ³

Earthwork excavation classification

Percentages are the selected dashboard classification applied to each measured source.


Foundation / stripping · 468 m³

Soil / rock	Share (%)	Code	Calculation	Quantity (m ³)
All Soils	100	IRR-CAW-1-1	468 × 100 / 100	468

Phreatic-line comparison

Reference and selected drainage conditions at the governing cross-section.

Parameter	Without drainage	Selected drainage
Focus datum RL (m)	95	95
Water depth (m)	3.5	3.5
Focal distance S; $q = K \times S$ (m)	0.288	0.288

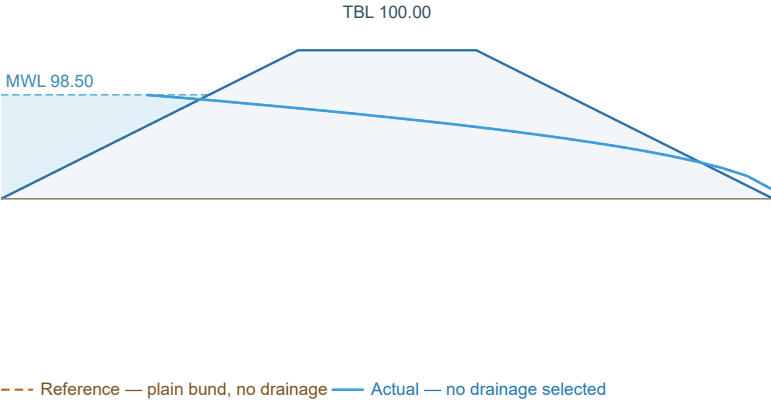

Payable quantities

Selected work codes and quantities from the same engine as the component dashboard. Distinct operations can share a measured volume; their quantities must not be added to obtain geometric fill.

No.	Code	Description	Unit	Quantity
1	IRR-PMW-1-2		m ²	1560
2	IRR-CAW-1-1		m ³	468
3	IRR-DAW-5-6		m ³	4800

External line