


Bund #1 [West]

NEW · HOMOGENEOUS

Test reservoir · 3 surveyed section(s) · Bund length 60 m · Datum 0 m · Crest width 6 m

MWL (m)	Freeboard (m)	TBL (m)	FTL (m)	U/S slope	D/S slope
98.5	1.5	100	98	2:1	2:1

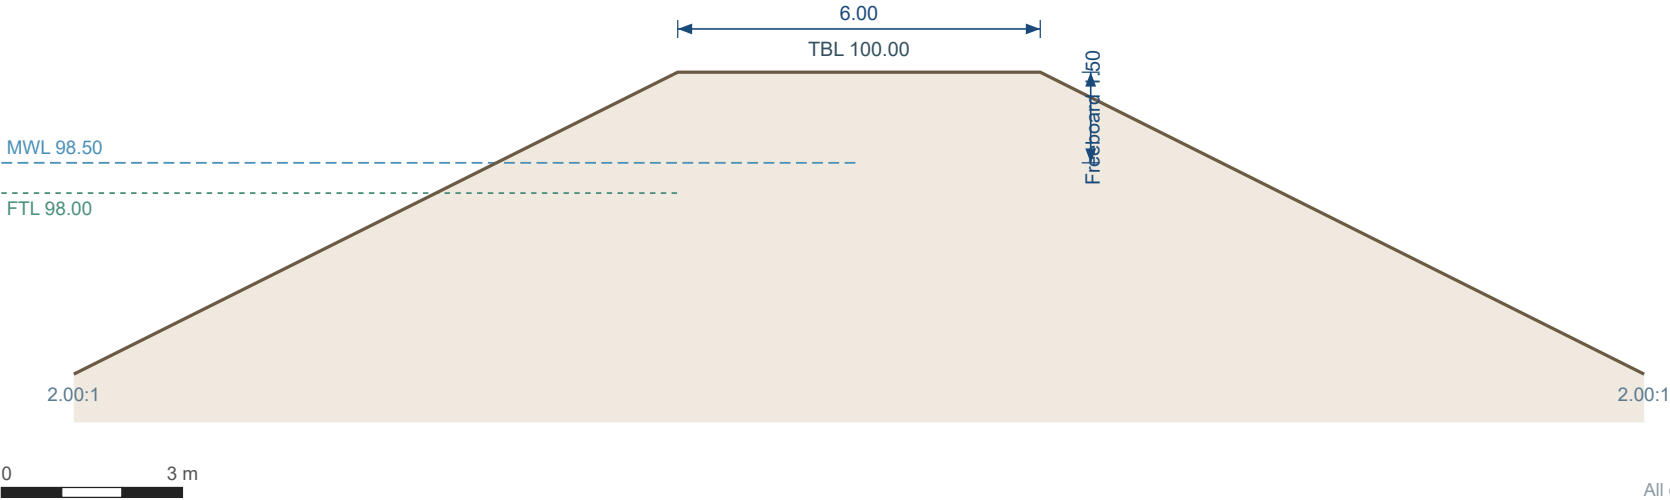

Statement of quantities — bund earthwork

Average section value = $(A1 + A2) / 2$. Interval quantity = average section value $\times$ length.

Chainage	Length (m)	Average toe RL (m)	Bund height (m)	Width at stripped level (m)	Jungle clearance			Bund foundation excavation — depth 0.3 m			Homogeneous soil fill		
					Section	Avg.	Total	Section	Avg.	Total	Section	Avg.	Total
					(m)	(m)	(m ²)	(m ²)	(m ²)	(m ³)	(m ²)	(m ²)	(m ³)
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
0	—	95	5.3	26	26	—	—	7.8	—	—	80	—	—
30	30	95	5.3	26	26	26	780	7.8	7.8	234	80	80	2400
60	30	95	5.3	26	26	26	780	7.8	7.8	234	80	80	2400
Total	60						1560			468			4800

Statement of quantities — slope and toe protection

U/S revetment		
Section	Avg.	Total
(m ²)	(m ²)	(m ³ / m ²)
(15)	(16)	(17)
80	—	—
80	80	2400
80	80	2400
Total		4800

Earthwork excavation classification

Percentages are the selected dashboard classification applied to each measured source.


Foundation / stripping · 468 m³

Soil / rock	Share (%)	Code	Calculation	Quantity (m³)
All Soils	100	IRR-CAW-1-1	$468 \times 100 / 100$	468

Phreatic-line comparison

Reference and selected drainage conditions at the governing cross-section.

Parameter	Without drainage	Selected drainage
Focus datum RL (m)	95	95
Water depth (m)	3.5	3.5
Focal distance S; $q = K \times S$ (m)	0.288	0.288

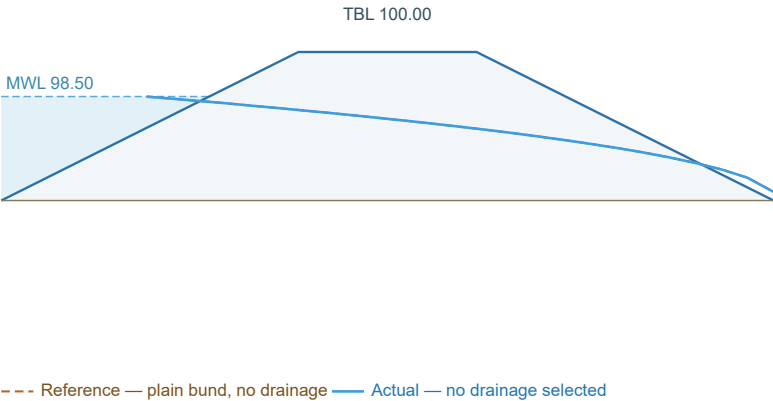

Payable quantities

Selected work codes and quantities from the same engine as the component dashboard. Distinct operations can share a measured volume; their quantities must not be added to obtain geometric fill.

No.	Code	Description	Unit	Quantity
1	IRR-PMW-1-2		m ²	1560
2	IRR-CAW-1-1		m ³	468
3	IRR-DAW-5-6		m ³	4800