


Bund #1 [West]

NEW · HOMOGENEOUS

Test reservoir · 3 surveyed section(s) · Bund length 60 m · Datum 0 m · Crest width 6 m

MWL (m)	Freeboard (m)	TBL (m)	FTL (m)	U/S slope	D/S slope
98.5	1.5	100	98	2:1	2:1

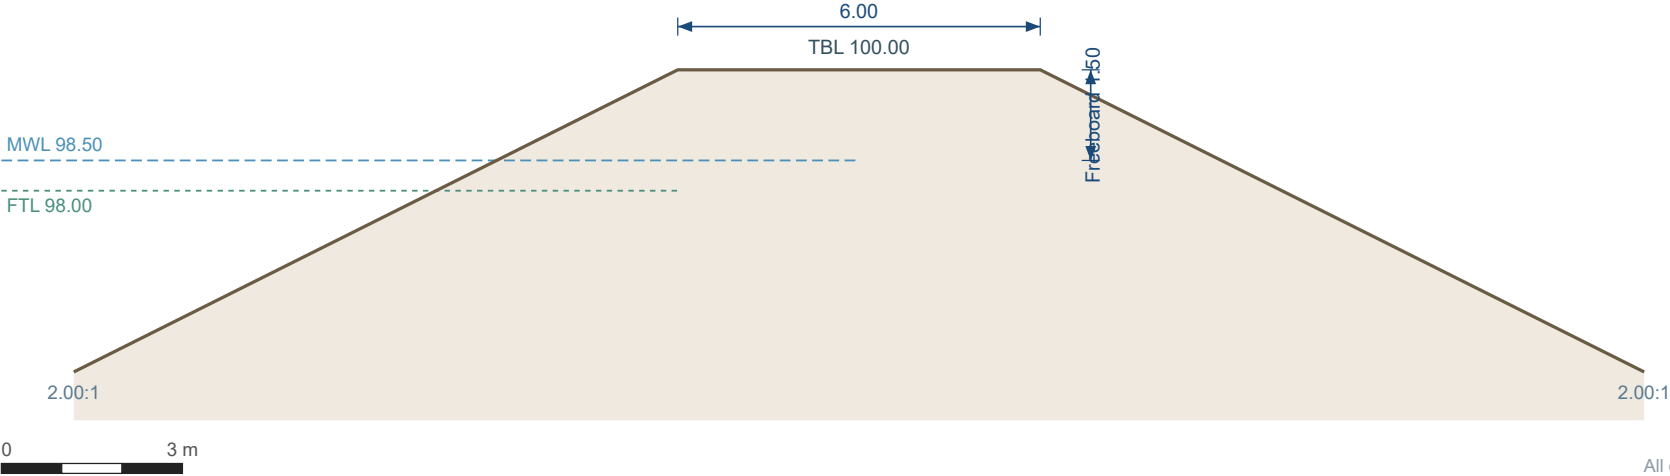

Statement of quantities

Average section value = (A1 + A2) / 2. Interval quantity = average section value × length.

Chainage	Length (m)	Average toe RL (m)	Bund height (m)	Width at stripped level (m)	Jungle clearance			Bund foundation excavation — depth 0.3 m			Homogeneous soil fill		
					Section	Avg.	Total	Section	Avg.	Total	Section	Avg.	Total
					(m)	(m)	(m²)	(m²)	(m²)	(m³)	(m²)	(m²)	(m³)
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)
0	—	95	5.3	26	26	—	—	7.8	—	—	80	—	—
30	30	95	5.3	26	26	26	780	7.8	7.8	234	80	80	2400
60	30	95	5.3	26	26	26	780	7.8	7.8	234	80	80	2400
Total	60						1560			468			4800

Earthwork excavation classification


Percentages are the selected dashboard classification applied to each measured source.

Foundation / stripping · 468 m³

Soil / rock	Share (%)	Code	Calculation	Quantity (m ³)
All Soils	100	IRR-CAW-1-1	$468 \times 100 / 100$	468

Component details

Upstream toe wall / anchorage

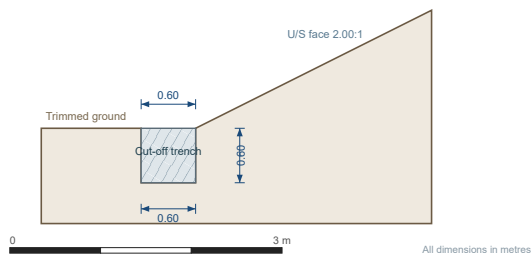

Dimension	Value
Top width (m)	0.6
Bottom width (m)	0.6
Depth (m)	0.6
Side slope (H:V)	1

Phreatic-line comparison

Reference and selected drainage conditions at the governing cross-section.

Parameter	Without drainage	Selected drainage
Focus datum RL (m)	95	95
Water depth (m)	3.5	3.5
Focal distance S; $q = K \times S$ (m)	0.288	0.288



--- Reference — plain bund, no drainage — Actual — no drainage selected

Payable quantities

Selected work codes and quantities from the same engine as the component dashboard. Distinct operations can share a measured volume; their quantities must not be added to obtain geometric fill.

No.	Code	Description	Unit	Quantity
1	IRR-PMW-1-2		m ²	1560
2	IRR-CAW-1-1		m ³	468
3	IRR-DAW-5-6		m ³	4800